



Fig./Abb. 1

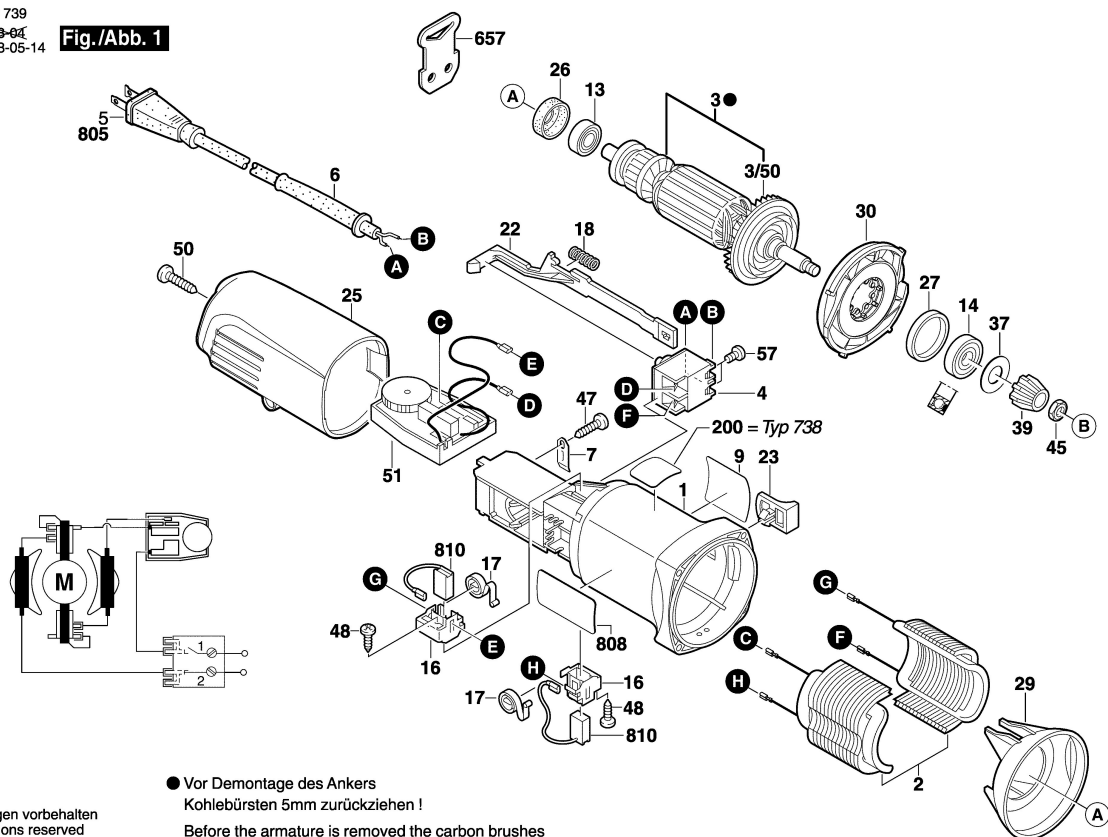

● Vor Demontage des Ankers
Kohlebürsten 5mm zurückziehen !
Before the armature is removed the carbon brushes
must be withdrawn by at least 5mm !

Änderungen vorbehalten
Modifications reserved
Modificaciones reservadas
Salvo modificaciones

Fig./Abb. 2

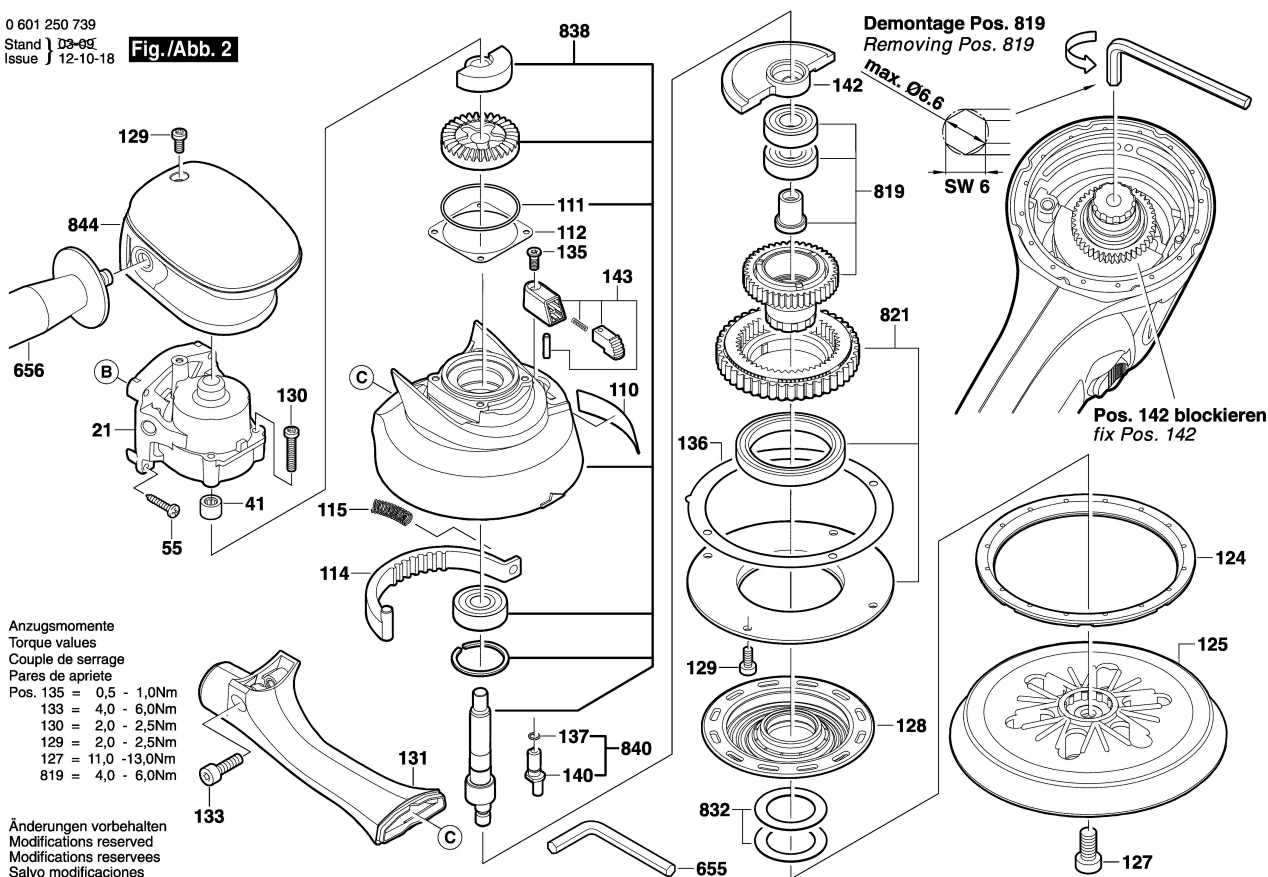

Demontage Pos. 819
Removing Pos. 819

max. Ø6,6

SW 6

Pos. 142 blockieren
fix Pos. 142

Anzugsmomente
Torque values
Couple de serrage
Pares de apriete
Pos. 135 = 0,5 - 1,0Nm
133 = 4,0 - 6,0Nm
130 = 2,0 - 2,5Nm
129 = 2,0 - 2,5Nm
127 = 11,0 - 13,0Nm
819 = 4,0 - 6,0Nm

Änderungen vorbehalten
Modifications reserved
Modificaciones reservadas
Salvo modificaciones