

Fig./Abb. 1

Exploded view diagram of the front suspension assembly, showing various components and their assembly order. The diagram includes a shock absorber, coil spring, and various bushings and washers. Dimensions are provided for the coil spring (230mm, 250mm, 25mm, 22mm). A note indicates the spring tensioning procedure: **Feder vorspannen / Spring tension / ressort pré-contraint / tensión previa del muelle**.

[illegible]

● = Pos. 897 1 617 000 224 ohne Fetttube
 1 617 000 224 without grease tube
 ● = Pos. 898 1 617 000 225 mit 3 Fettuben à 45ml
 1 617 000 225 with 3x 45ml grease tubes
 Bitte Schmierhinweise beachten!
 Please note lubrication instructions!

72

74

138
173

139

39

164

76

171

73

137

4

4/10

80

6

005

81

75

82

174

174

174

weiß
white

schwarz
black

842/020

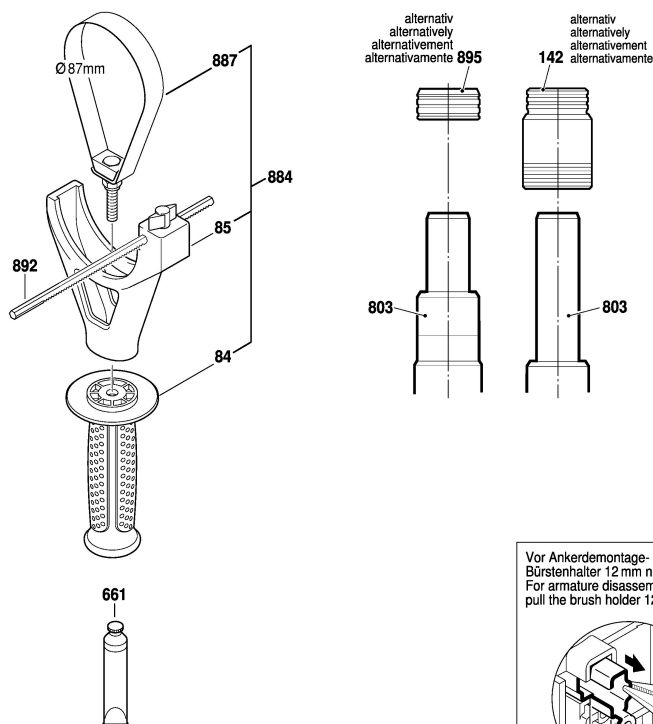
842/080

12mm

Vor der Ankerdemontage
 beide Bürstenführungen
 12 mm nach außen ziehen!
 Before armature disassembly
 pull both brush holders
 12 mm outwards!

New execution
 Neue Ausführung
 Nouvelle exécution
 Nueva ejecución

1 619 973 158

Fig./Abb. 2

Vor Ankerdemontage- und Montage beide Bürstenhalter 12 mm nach außen ziehen.
For armature disassembly and assembly pull the brush holder 12 mm outwards.



12mm 842/080